




MICRO SQUIGGLE™

SHORT SPECIFICATION SHEET

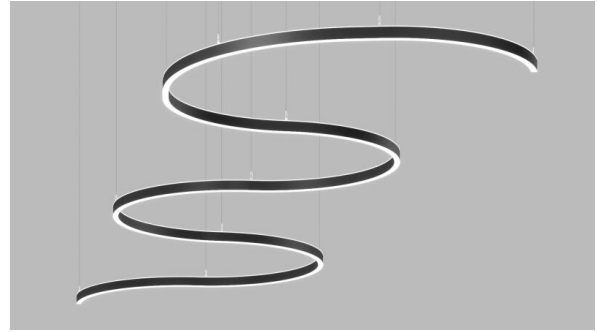

Fixture Type

Fixture Code

Quantities

1 HOW TO ORDER

1. LUMINAIRE

MQUG Pendant

2. DIRECTION

DT1 Direct

DT2 Direct/Indirect

3. SECTION TYPES

SCA16 Curve 16"

SCA30 Curve 30"

SCA42 Curve 42"

SCA48 Curve 48"

SCA54 Curve 54"

SCA72 Curve 72"

SCB28 Straight 28"

SCB36 Straight 36"

SCB47 Straight 47"

SCB72 Straight 72"

SCB95 Straight 95"

SCC01 Cross Section

SCD01 Corner Section

SCE01 T Section

Select from one of the sections.

Each section is to be ordered as a separate line item.

4. END CAP

ENC00 Not required

ENC_ _ End Cap

5. LUMENS (DIRECT)

LPF017 175 lm/ft

LPF026 260 lm/ft

LPF035 350 lm/ft

6. LUMENS (INDIRECT)

LPG000 Not required

LPG017 175 lm/ft

LPG026 260 lm/ft

LPG035 350 lm/ft

7. CRI

CR80 CRI 80+

CR90 CRI 90+

8. CCT (DIRECT)

CTA27 2700K

CTA30 3000K

CTA35 3500K

CTA40 4000K

9. CCT (INDIRECT)

CTB00 Not required

CTB27 2700K

CTB30 3000K

CTB35 3500K

CTB40 4000K

10. VOLTAGE

V1 120/277V

V2 240V ¹

V3 347V ²

V4 Low Voltage ³

¹ Not available in North American.

² Only available with DA01 dimming.

³ Only available with DA45 dimming.

11. DIMMING

DA01 0-10V Dimming 1.0%

DA02 0-10V Dimming 0.1% ¹

DA20 DALI Dimming 0.1% ¹

DA21 DALI Dimming 1.0% ¹

DA45 PoE ³

¹ Not available with V3.

² Not available in North America.

³ Available with V4 only.

12. SUSPENSION

SS1 Vertical, Remote driver

SS3 Vertical, Integral driver

13. FIXTURE FINISH

FA01 White

FA02 Black Metallic – Textured

FA20 Silver Metallic – Textured

FA25 Gold Metallic – Textured

FA44 Midnight Blue Metallic –
Textured

FA45 Copper Metallic

FA46 Charcoal Metallic –
Textured

FA47 Bronze Metallic – Textured

FA52 Champagne Metallic

FA53 Red Metallic – Textured

14. CANOPY FINISH

CF01 White

CF02 Black Metallic – Textured

CF20 Silver Metallic – Textured

CF25 Gold Metallic – Textured

CF44 Midnight Blue Metallic –
Textured

CF45 Copper Metallic

CF46 Charcoal Metallic –
Textured

CF47 Bronze Metallic – Textured

CF52 Champagne Metallic

CF53 Red Metallic – Textured

15. EMERGENCY SECTIONS

E0 Not required

E2 Emergency system – Remote ¹

¹ Consult factory.

Note: a drawing will be required at time of ordering to determine the required location of the emergency sections.

16. CIRCUITS

CS1 Single circuit

CS2 Dual circuit