

1. These instructions may not cover all details or variations. For additional information contact Beta-calco.
2. Luminaires must be installed in accordance with national electrical code and local regulation.
3. Disconnect the power before installing the fixture or servicing.
4. Never touch the yellow portion of the led chip or damage may occur.
5. Min 90°C supply conductors.

INSTALLATION STEPS:

13. Assemble the last section. Install the end plate using supplied 1/4-20 nuts and lock washers.
14. Lift the section and attach the loose ends of two aircraft cables to the cable gliders. Level the section using the cable gliders.
15. Fasten sections together using the alignment plates and connection brackets. Please use separate "RING-SQUIGGLE-MACRO - CONNECTION INSTRUCTIONS" for the connection brackets installation and connecting sections together.
16. Insert diffusers textured side down by sliding into the end of the section (ensure diffuser overlaps are in the correct orientation). It is important to install diffusers before connecting section to each other.
17. Make wiring connections between segments using supplied cables.
18. Connect the power cord(s) to the fixture through one of the suspension connection brackets (around each suspension connection bracket there are connectors to connect the power cord). To secure the power cord to the bracket, remove the plastic dome plug(s) and use the strain relief bushing(s) (Fig 8).
19. Make a propriate wiring connections and attach the canopy to the junction box using the bracket / nipple / finial assembly (Fig. 9).
20. Re-install top covers. If the bracket of the end plate chosen to connect the power cord, remove the knockout on the top cover (Fig. 10).
21. Re-check the level of the entire fixture and adjust aircraft cables as nessesary. Trim excess aircraft and power cables (Fig. 5).
22. Use supplied silicone and plastic knife to cover the inside the joints between sections and the ends to prevent light leaks.

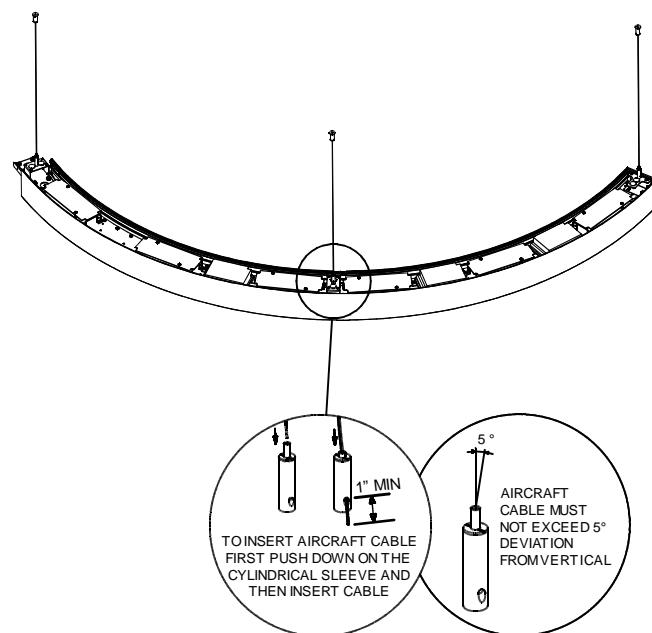


Fig. 5

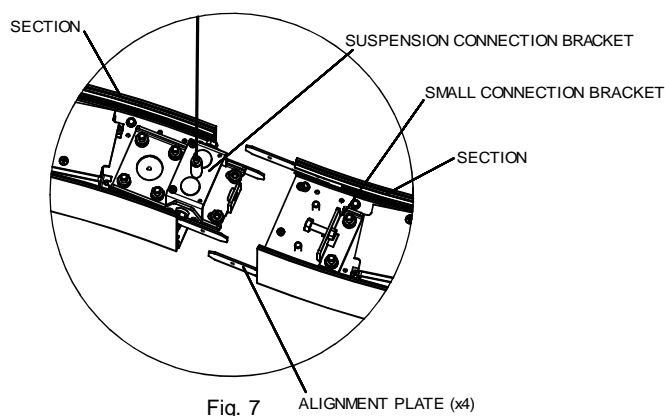


Fig. 7

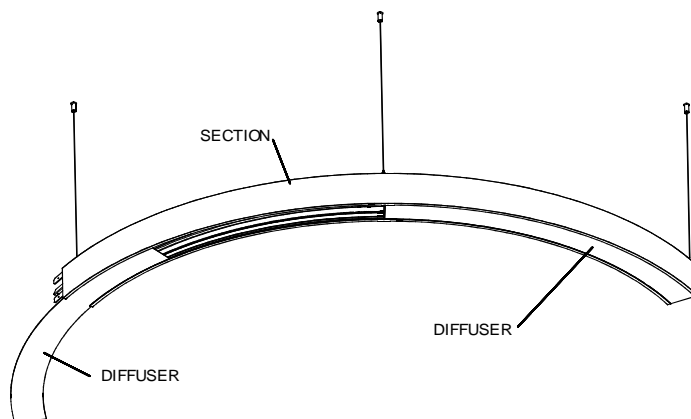


Fig. 6

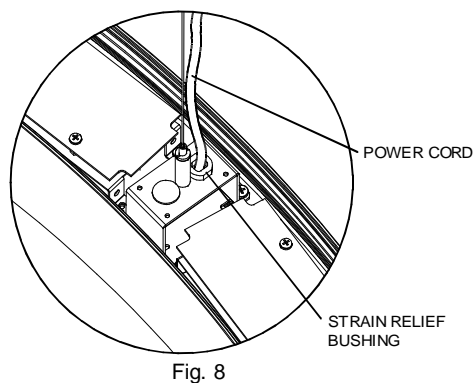


Fig. 8




Fig. 9

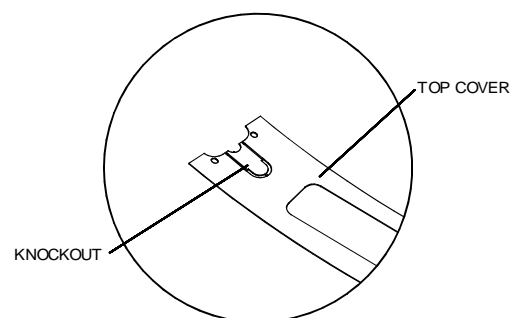


Fig. 10

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS

FIXTURE DESCRIPTION: PENDANT