

- 1: These instructions may not cover all details or variations. For additional information contact Beta-Calco.
- 2: Luminaires must be installed in accordance with national electrical code and local regulation.
- 3: Disconnect the power before installing the fixture or servicing.
- 4: Min 90°C supply conductors.

### PENDANT HOUSING INSTALLATION:-

1.1 Mount the couplers to the ceiling using appropriate fasteners (by others) according to the structure of the ceiling (see fig 1 & Table-1).



1.2 Pass the aircraft cables through the caps (see fig 4).

1.3 Fasten the caps to the couplers.

1.4 Lift the fixture and attach the loose ends of the four aircraft cables to the cable gliders (see fig 3).


1.5 Make appropriate wiring connections and attach the canopy to the junction box using the bracket / nipple / finial assembly provided.

1.6 Level the fixture using the cable gliders.

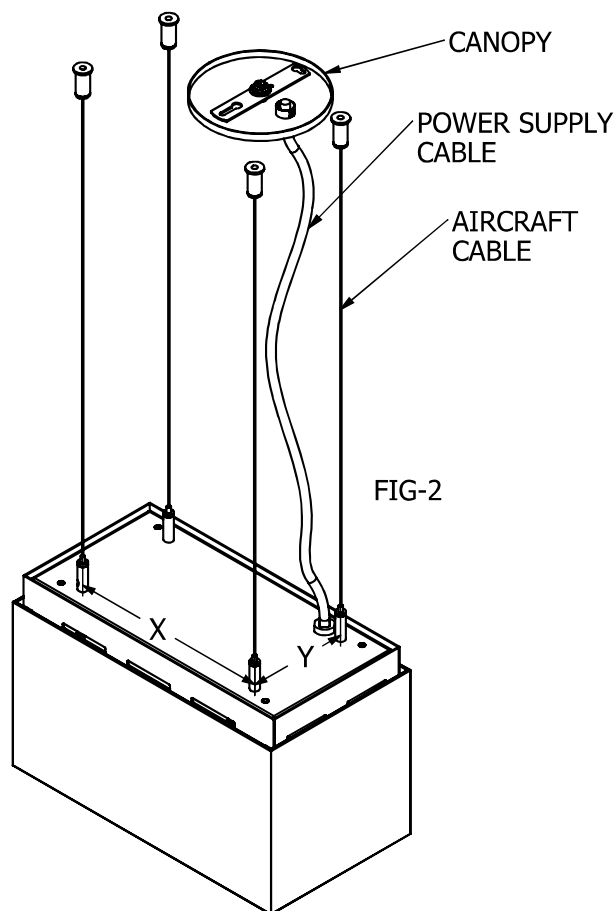
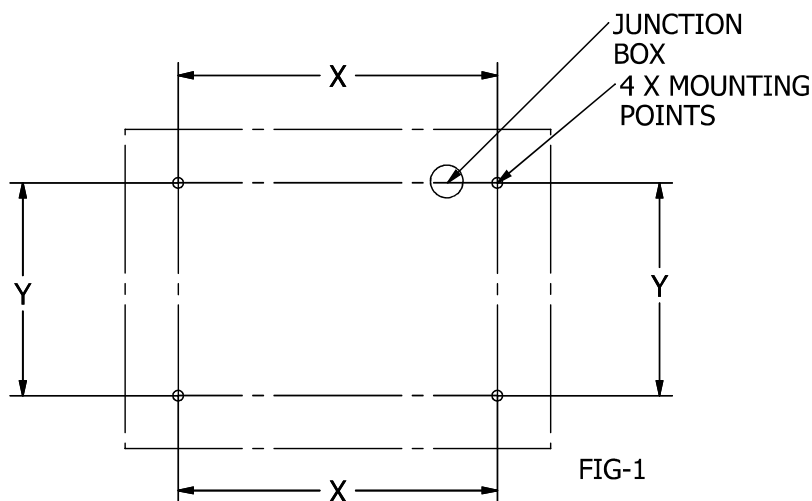


**TABLE-1**

	12IN	18IN	24IN	36IN	48IN	60IN	72IN	84IN
X	8IN	12IN	18IN	30IN	42IN	54IN	66IN	42IN
Y	4IN	4IN	4IN	4IN	4IN	4IN	4IN	4IN



TO INSERT AIRCRAFT CABLE  
FIRST PUSH DOWN ON THE  
CYLINDRICAL SLEEVE AND  
THEN INSERT CABLE.

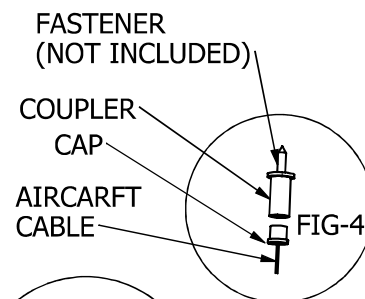

AIRCRAFT CABLE MUST  
NOT EXCEED 5°  
DEVIATION FROM VERTICAL