


1 OPEN PLAN OFFICE SPACE

Comfort diffuser with 300lms/ft direct and 500lms/ft indirect


Room Size:	50'x50'	Workplane 30" above finished floor (fc level)	48
Ceiling height:	10'	Workplane uniformity max to min	1.4 to 1
Luminaire mounting height:	8'5"	Ceiling uniformity maximum to minimum	6.3:1
Reflectances:	80/50/20	UGR average	<16
Light loss factor:	1.0	Watt sq/ft	0.47

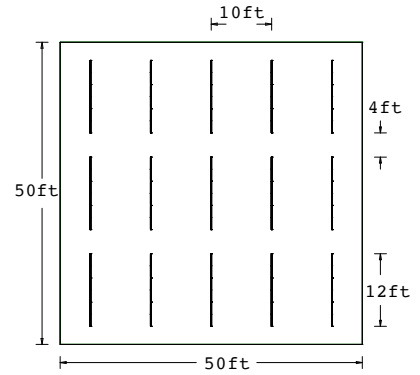

2 SINGLE OFFICE SPACE

Comfort diffuser with 300lms/ft direct and 500lms/ft indirect

Room Size:	10'x10'	Workplane 30" above finished floor (fc level)	34
Ceiling height:	10'	Ceiling uniformity maximum to minimum	3.5:1
Luminaire mounting height:	8'5"	UGR average	<12
Reflectances:	80/50/20	Watt sq/ft	0.53
Light loss factor:	1.0		

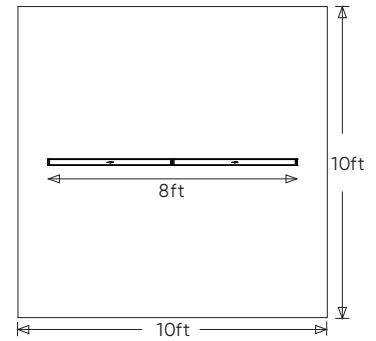

3 CORRIDOR SPACE

Comfort Diffuser with 300lms/ft direct and 300lms/ft indirect

Room Size:	8'x40'	Workplane 30" above finished floor (fc level)	23
Ceiling height:	10'	Watt sq/ft	0.4
Luminaire mounting height:	8'5"		
Reflectances:	80/50/20		
Light loss factor:	1.0		

