

## 1 IMPORTANT NOTE


Fixture comes partially assembled.

⚠ Ensure electrical circuit is disconnected before installation.

⚡ Luminaires must be installed in accordance with National electrical code and local regulation.

## 2 MOUNTING LOCATIONS


### 4FT

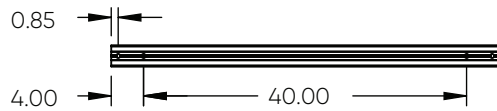

### 6FT




### 8FT

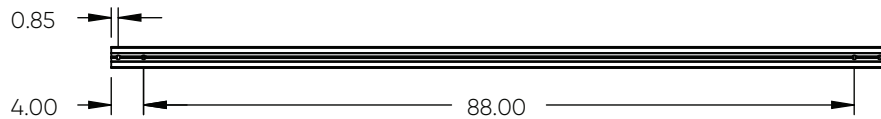

### 10FT



### 12FT

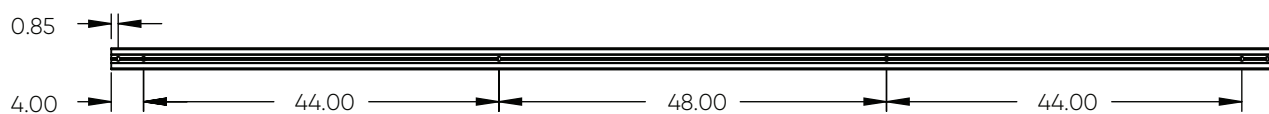

Power feed is always located 0.85" from end of the housing.

### 3 STANDALONE / NON-CONTINUOUS INSTALLATION

#### STEP 1

Remove the end cap by pulling it away from fixture. (See FIG 1)

#### STEP 2

Remove the diffuser(s) and reflector(s) at the ends of the sections. (See FIG 2)

#### STEP 3

Disconnect connection between reflector and fixture. (See FIG 2)

#### STEP 4

Make electrical connections between the power source and fixture.

#### STEP 5


Secure fixture by lifting onto the ceiling and fastening screws (not included). (See FIG 3)

#### STEP 6

Re-make all wiring connections to the reflector(s).

#### STEP 7

Re-install diffuser and reflector(s).

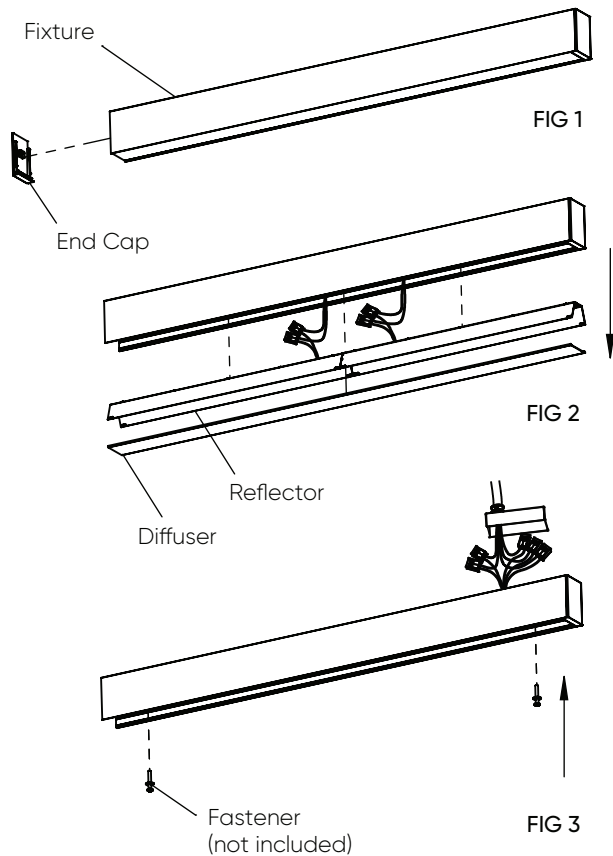



### 4 CONTINUOUS INSTALLATION


#### STEP 8

Remove diffusers and reflectors at the ends of the sections. (See FIG 4)

#### STEP 9

Align the next fixture segment to the previous segment by sliding the segments together. (See FIG 5 and FIG 6)

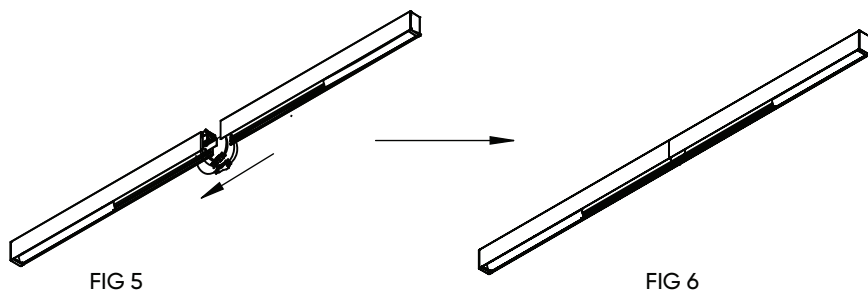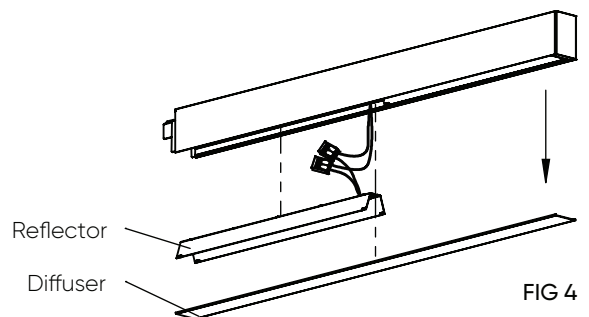

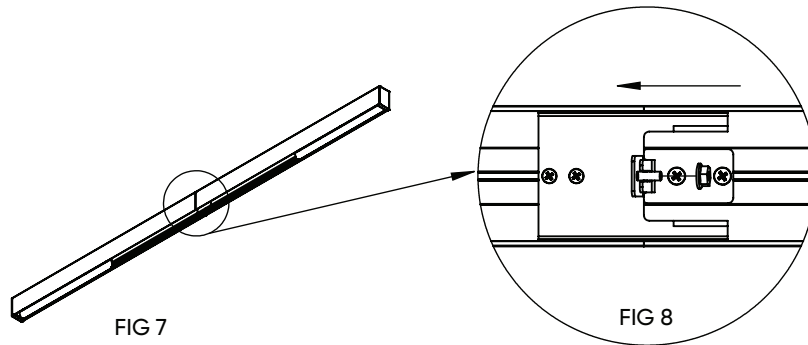

**STEP 10**

Connect the two segments together by fastening the hex nut. (See FIG 8)

**STEP 11**

Re-make all wiring connections to the reflector(s).

**STEP 12**

Re-install diffuser and reflector(s).

**STEP 13**

Repeat steps 4-12 until entire fixture has been installed.

**STEP 14**

In the event of EM drivers are used: access the drivers and switch EACH driver to 'on' position before plugging into power.



**5 CONTINUOUS SEAMLESS DIFFUSER INSTALLATION**

**STEP 1**

Measure entire fixture length from start end cap to the last end cap.  
The desired seamless diffuser length can be between 0.75" to 1.25" shorter than fixture length.

**STEP 2**

Make a straight incision mark on the seamless diffuser using a box knife or cutting tool.

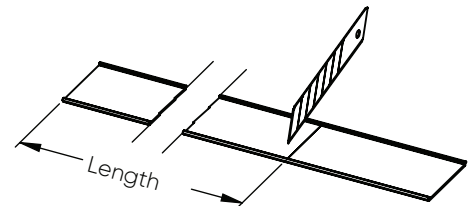

**STEP 3**

Snap at incision mark and install seamless diffuser.

