


- 1: These instructions may not cover all details or variations. For additional information contact Beta-calco.
2: Luminaires must be installed in accordance with national electrical code and local regulation.
3: Disconnect the power before installing the fixture or servicing.
4: Min 90°C supply conductors.


Installation instructions:

Fixture shipped partially assembled

- 1.Decide power cord length adding 5" extra for lamp/ballast connection inside the canopy
- 2.Feed power cord through canopy - see FIG#3
- 3.Attach mounting bracket to J-box
- 4.Insert aircraft cable into glider
- 5.Attach remote ballast disc to the mounting bracket (2 x side screws supplied)
- 6.Make appropriate wires connections to J-box (by others) including the grounding on the remote ballast disc
- 7.Lift canopy and snap on remote ballast disc (using 2 x magnets supplied)
- 8.Adjust aircraft cable - see FIG#2

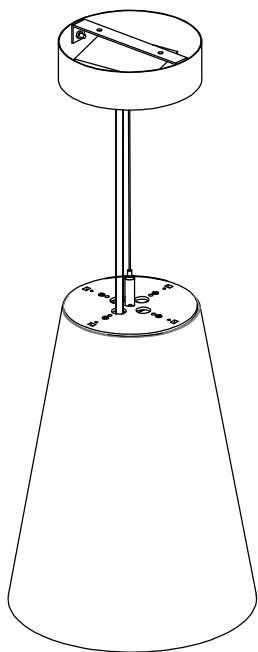


MAIN VIEW

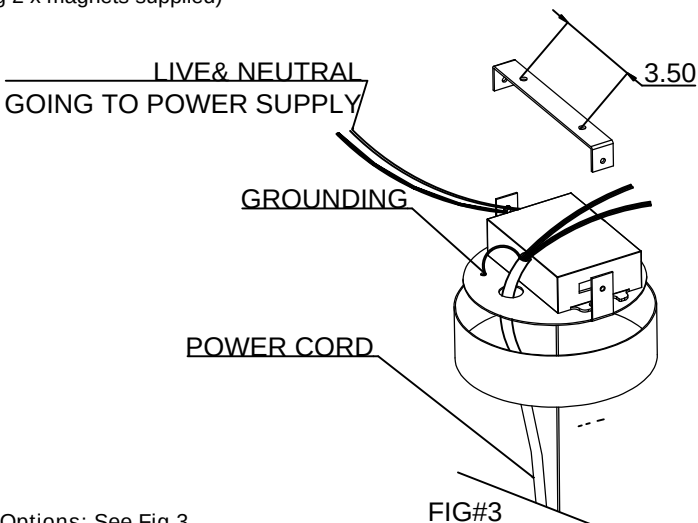


FIG#3

Disc /Ring Options: See Fig.3

1. Attach 3 cradle bars to the top disc (screws supplied)
2. Insert disc / ring
3. Attach the fourth cradle bar

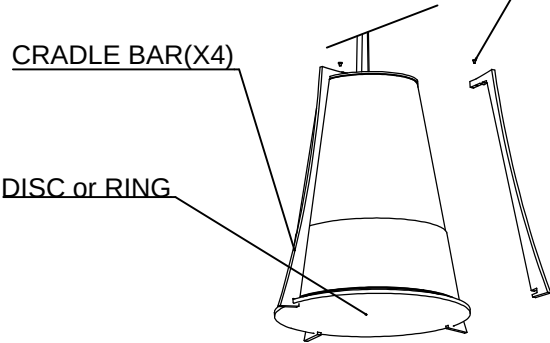

FIG#4

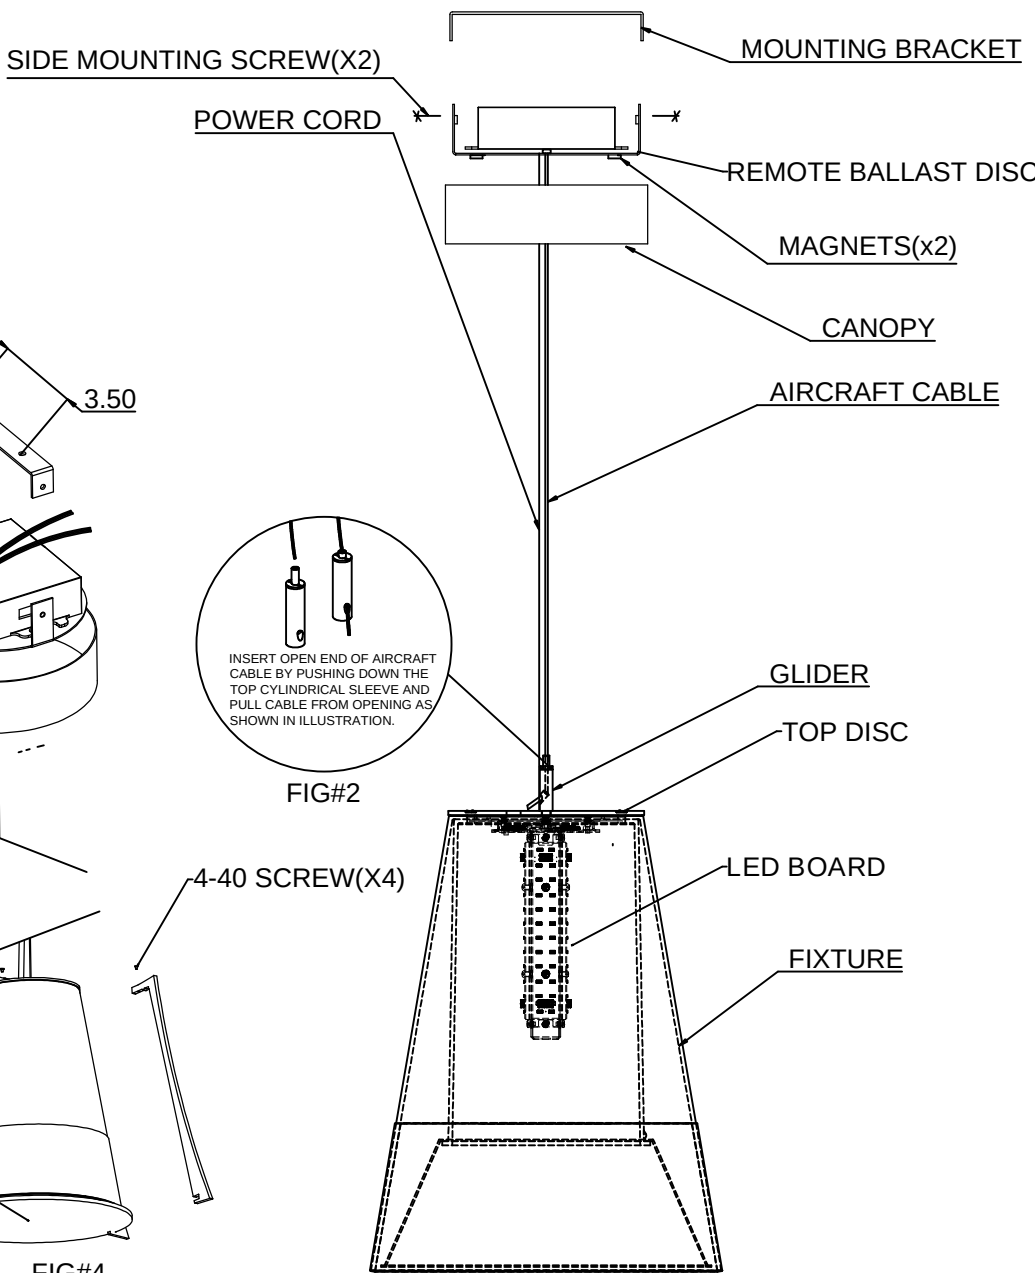

FIG#1

NOTE: USE COTTON GLOVES WHEN INSTALLING OR HANDLING FIXTURES WITH PLATED FINISH OR GLASS/FAUX GLASS DECORATIVE COMPONENTS

FIXTURE DESCRIPTION: KIORA PENDANT-AIRCRAFT CABLE.REF:44120X

BETA-CALCO INC. 25 KODIAK CRESCENT , TORONTO ONTARIO CANADA M3J3E5

