



MACRO STRAIGHT™

SHORT SPECIFICATION SHEET



Fixture Type

Fixture Code

Quantities


1 DESCRIPTION

The robust 4" linear profile boasts above-average light output, ideal for general illumination at standard ceiling heights. An indirect light option is available with either a clear or opal diffuser. Available in 10 decorative finishes, as well as 2 wood grain finishes Light Cherry and Dark Walnut. Three color temperatures are available plus monochromatic red, green, and blue. **MACRO STRAIGHT** can integrate with your data network via Power over Ethernet.


2 MOUNTING & OPTICS



Suspended
Direct



Suspended
Direct/Indirect



Declare



PoE

3 APPROVALS



4 GENERAL SPECIFICATION

BODY AND TRIM

Steel and aluminum.

FINISH

Polyester powder coated.

DIFFUSERS

Opal polycarbonate, supplied in sections.

POWER CABLE

Silver braided.

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

DRIVERS

Integral, HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral to the fixture housing.

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K (min 80 CRI) for white LEDs only.

APPROVALS

Damp Rated.

SUSPENSION

Steel cables. Recommended minimum distance from ceiling: 12" (305mm) for white LEDs and 24" (610mm) for colored LEDs (only for direct/indirect).

MECHANICAL


Luminaires mount directly over J box (by others - North America only).

L70 @25°C (77°F)

> 60,000 hrs.


5 DESIGN OPTIONS

FIXTURE FINISH

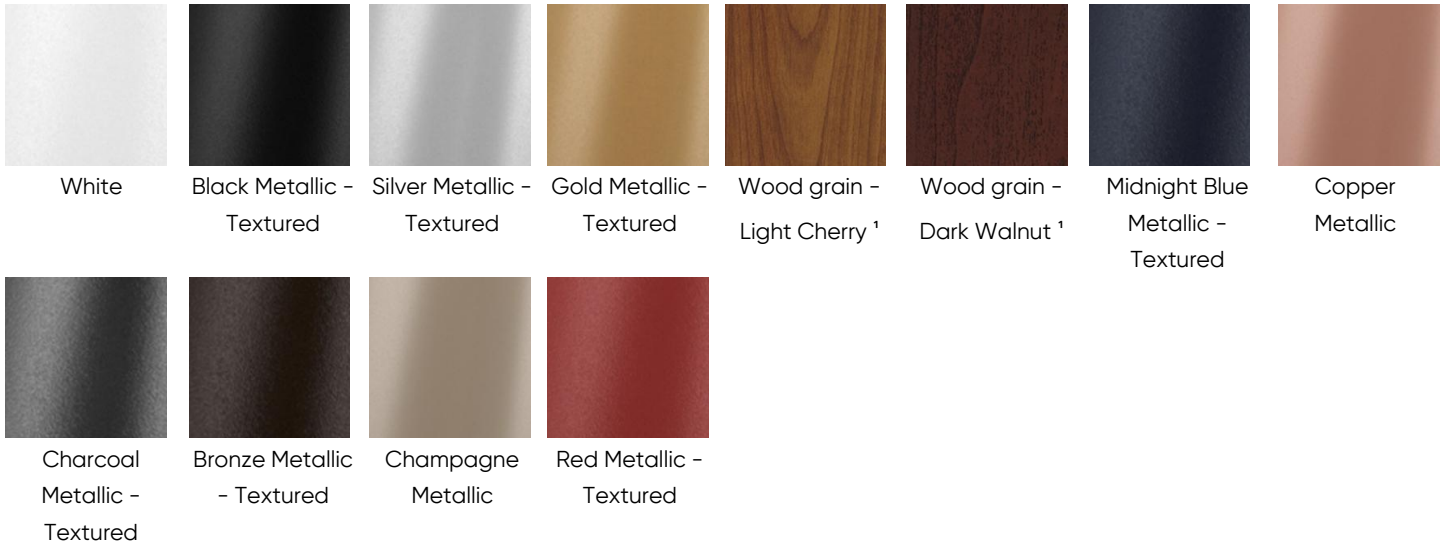

¹ Longer lead time may apply, consult factory.

CANOPY FINISH

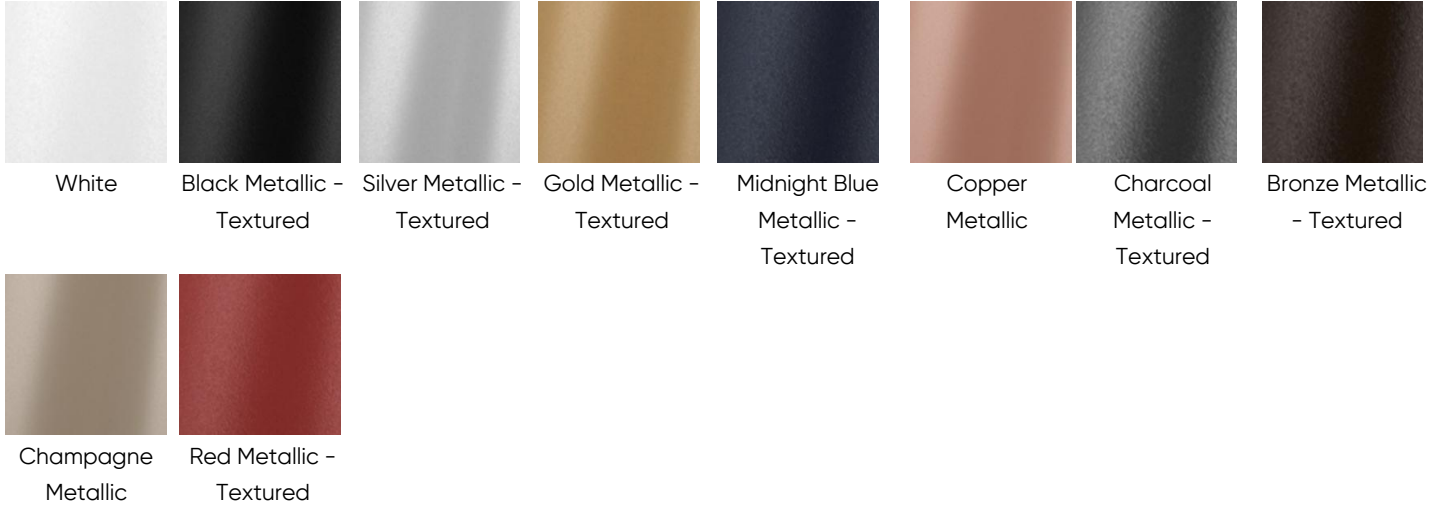

6 HOW TO ORDER

A. LUMINAIRE

MCRP1P Direct

MCRP2P Direct/Indirect

LENGTH OF RUN

SFA_ _ _ _

Length of run is 3, 4, 5, 6, 7 or 8ft only, not available as a continuous run.

FIXTURE LENGTH

SL03 3ft	SL04 4ft	SL05 5ft	SL06 6ft
SL07 7ft	SL08 8ft		

B. LUMENS/FT (DIRECT)

LPF028 285 lm/ft	LPF057 575 lm/ft	LPF085 850 lm/ft	LPF115 1150 lm/ft
------------------	------------------	------------------	-------------------

C. LUMENS/FT (INDIRECT)

LPG00 Not required	LPG012 125 lm/ft	LPG025 250 lm/ft	LPG037 375 lm/ft
LPG050 500 lm/ft			

D. CRI

CR80 CRI 80+

E. CCT DIRECT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
CTA54 Red	CTA55 Green	CTA56 Blue	

CCT INDIRECT

CTB00 Not required	CTB27 2700K	CTB30 3000K	CTB35 3500K
CTB40 4000K	CTB54 Red	CTB55 Green	CTB56 Blue

F. UPLIGHT DIFFUSER

UD0 Not required	UD1 Clear diffuser	UD2 Opal diffuser ¹
------------------	--------------------	--------------------------------

¹ 10% reduction on indirect lumens.

G. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ² **V4** Low Voltage ³

¹ Not available in North America.

² Available with DA01 dimming only.

³ Only available with DA45 dimming.

H. DIMMING

DA01 0–10V Dimming 1.0% **DA02** 0–10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ² **DA45** PoE ³

¹ Not available with V3.

² Not available in North America.

³ Only available with V4.

I. FIXTURE FINISH

FA01 White **FA02** Black Metallic – Textured **FA20** Silver Metallic – Textured **FA25** Gold Metallic – Textured
FA27 Wood grain – Light Cherry ¹ **FA28** Wood grain – Dark Walnut ¹ **FA44** Midnight Blue Metallic –
Textured **FA45** Copper Metallic
FA46 Charcoal Metallic –
Textured **FA47** Bronze Metallic – Textured **FA52** Champagne Metallic **FA53** Red Metallic – Textured

¹ Longer lead time may apply, consult factory.

J. CANOPY FINISH

CF01 White **CF02** Black Metallic – Textured **CF20** Silver Metallic – Textured **CF25** Gold Metallic – Textured
CF44 Midnight Blue Metallic –
Textured **CF45** Copper Metallic **CF46** Charcoal Metallic –
Textured **CF47** Bronze Metallic – Textured
CF52 Champagne Metallic **CF53** Red Metallic – Textured

K. EMERGENCY

E0 Not required **E1** Emergency system – Integral ¹

¹ Direct illumination and 120/277V or 240V only. Consult factory.

L. CIRCUITS

CS1 Single circuit

CS2 Dual circuit


M. CONTROLS

C0 Not required

C1 Encelium/Zigbee


7 TM-30 DATA

CCT 2700K

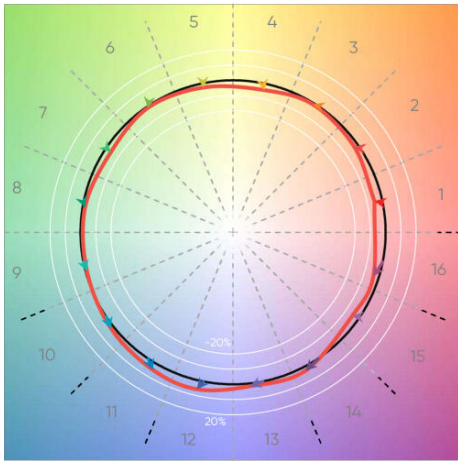


CRI(Ra)	93
CRI(R9)	61
TM30(Rf)	91
TM30(Rg)	98
Duv	-0.0022

CCT 3000K

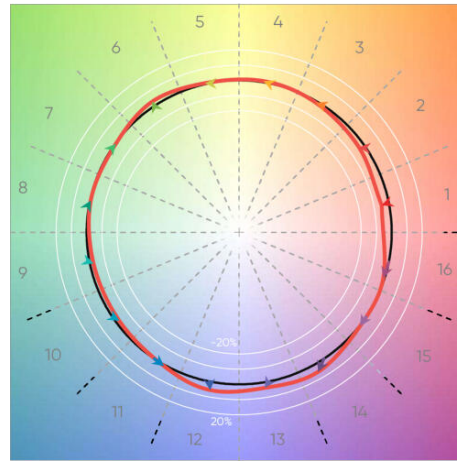


CRI(Ra)	92
CRI(R9)	58
TM30(Rf)	92
TM30(Rg)	100
Duv	-0.0003

CCT 3500K

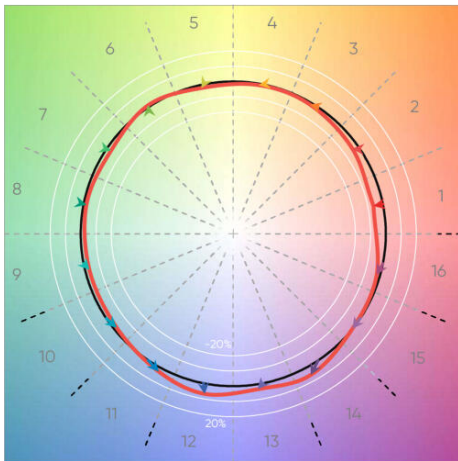

CRI(Ra)	91
CRI(R9)	53
TM30(Rf)	90
TM30(Rg)	99
Duv	-0.0007

CCT 4000K

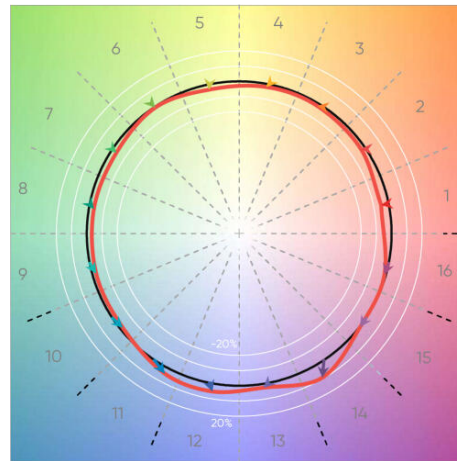

CRI(Ra)	93
CRI(R9)	64
TM30(Rf)	90
TM30(Rg)	98
Duv	0.0000

8 DIMENSIONAL DIAGRAMS

