




OOOOH™

SHORT SPECIFICATION SHEET

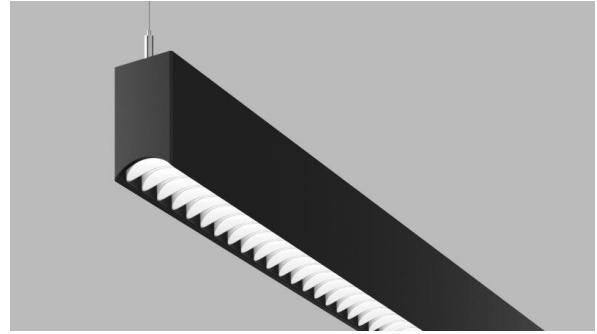

Fixture Type


Fixture Code

Quantities

1 DESCRIPTION

OOOOH dazzles up traditional linear lighting concepts with an innovative louver system. An array of ellipses is incurved to conform to a tunnel-shaped profile creating a subtle aesthetic and sublime lighting effect. The louver system not only tempers the starkness of the commonly exposed diffuser and adds an enchanting decorative feature, but also offers visual comfort by minimizing glare. The injection-molded louvers come in 5 finishes: Black for the highest glare control, White for higher reflectance and performance, and for an interior design enhancement, satinized finishes Satin Chrome, Satin Gold, and Satin Champagne. Ooooh presents a simple way to transform a functional light into a luxurious design feature.

2 MOUNTING & OPTICS

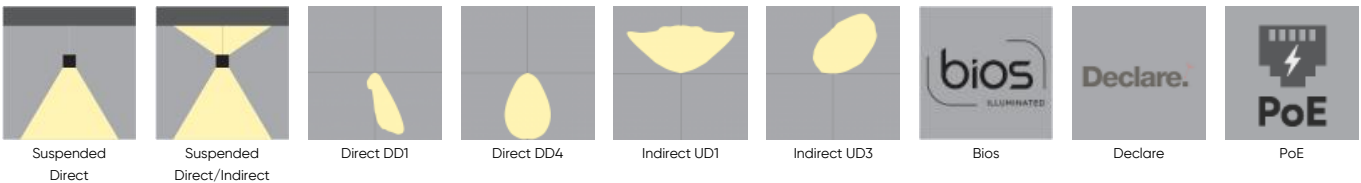

3 APPROVALS



4 GENERAL SPECIFICATION

BODY

Aluminum.

FINISH

Powder coated.

SUSPENSION

Steel cables.

POE

Can be integrated into your data network via Power over Ethernet (PoE) connectivity.

DRIVERS

HPF electronic drivers for 120-277V, 347V (EU-240V). The driver is integral to the fixture housing.

REPORTED L70 @25°C (77°F)

> 60,000 hrs @ 2000 lumens/ft (6000 lumens/m)

DELIVERED LUMENS

Delivered lumens & LPW based on 4000K CRI 80+

INTEGRAL EMERGENCY SYSTEM

Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The self contained system includes the inverter module, NiCad batteries, LED charge indicator and test switch (NA only). Not available with a 347V supply.

TUNABLE WHITE

Tunable White range from 2700K to 6500K is available; contact the factory for details.

APPROVALS

Damp Rated.

DESIGN

US Pat. No. D969,395.

POWER CABLE

Silver braided.

BIOS

For circadian lighting, consult factory.

DIFFUSER

Opal acrylic. 2.4" width.

ESTIMATED L70 @25°C (77°F)

> 165,000 hrs @ 2000 lumens/ft (6000 lumens/m)

MECHANICAL

Luminaires mount directly over J box (by others).

SENSORS

Compatible with Avi-On, Casambi, Enlighted, Lutron Vive, nLight, NX Lighting Controls, Osram, Philips, and others. Consult factory.

RGBW


RGBW available, consult factory.

DESIGNED BY


Serge Cornelissen.

5 DESIGN OPTIONS

LOUVER

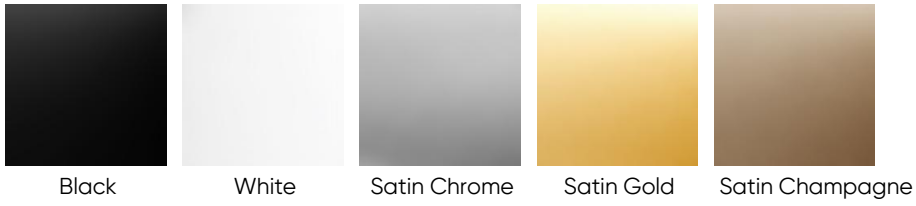


FINISH

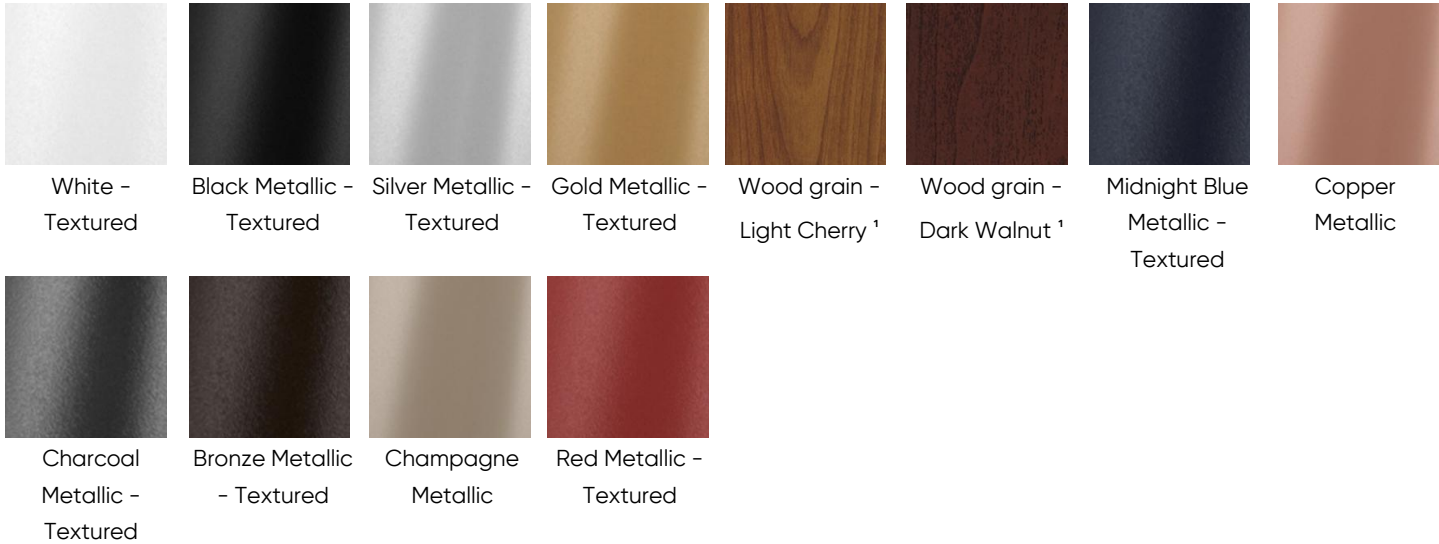

¹ Longer than normal lead times may apply, consult factory.

CANOPY FINISH

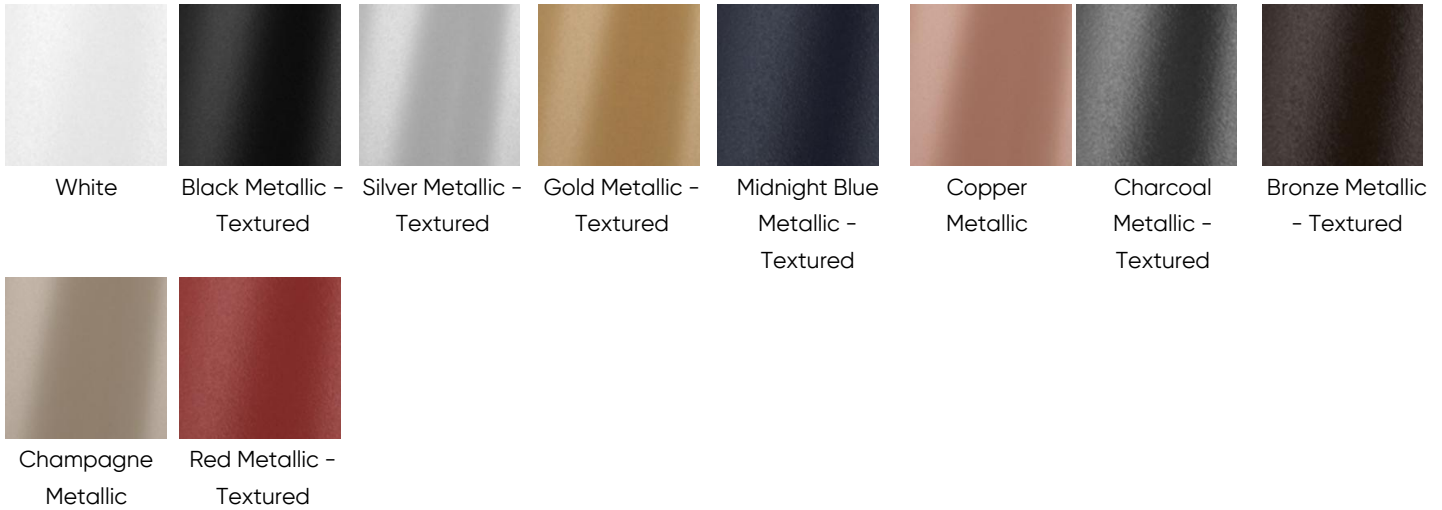

6 HOW TO ORDER

A. LUMINAIRE

HLNL1P Direct **HLNL2P** Direct/Indirect

One power cord for every 50 linear feet.

B. LENGTH OF RUN

SFA _ _ _ _

The minimum length of order is 4ft. Lengths are to be in 2ft increments.

Example: 4ft = SFA0400

Example: 10ft = SFA1000

Example: 50ft = SFA5000

For runs over 50ft in length, consult factory.

C. MAX LENGTH PER SECTION

SL04 4ft **SL06** 6ft **SL08** 8ft **SL10** 10ft
SL12 12ft

You can select the preferred maximum length per segment, to account for transportation and building constraints. Example: If a 40ft run is required and SL12 (12ft) is selected, we would provide 4 10ft segments. For special requirements, please contact sales@betacalco.com.

D. LOUVER

LV2 Black	LV3 White	LV4 Satin Chrome	LV6 Satin Gold
LV9 Satin Champagne			

E. LM/FT (DIRECT)

LPF020 200 lm/ft	LPF030 300 lm/ft	LPF040 400 lm/ft	LPF050 500 lm/ft
LPF060 600 lm/ft	LPF070 700 lm/ft	LPF080 800 lm/ft	LPF100 1000 lm/ft
LPF120 1200 lm/ft	LPF130 1300 lm/ft		

Lumens/ft are determined by the color of the Louver. Consult website for available lumens/ft based on selected louver.

F. LM/FT (INDIRECT)

LPG000 Not required	LPG020 200 lm/ft	LPG040 400 lm/ft	LPG060 600 lm/ft
LPG080 800 lm/ft	LPG100 1000 lm/ft	LPG120 1200 lm/ft	LPG140 1400 lm/ft
LPG165 1650 lm/ft			

Consult website for available lumens/ft.

G. CRI

CR80 CRI 80+	CR90 CRI 90+
---------------------	---------------------

H. CCT DIRECT

CTA27 2700K	CTA30 3000K	CTA35 3500K	CTA40 4000K
--------------------	--------------------	--------------------	--------------------

I. CCT INDIRECT

CTB00 Not required	CTA27 2700K	CTB30 3000K	CTB35 3500K
CTB40 4000K			

J. DIRECT DIFFUSER

DD1 Asymmetric diffuser	DD4 Comfort Diffuser
--------------------------------	-----------------------------

¹ When standing at the end view of the profile on the side where the power cord is installed, the asymmetric beam will aim to the right.

K. UPLIGHT DIFFUSER

UD0 Not required **UD1** Clear diffuser (Batwing distribution)
UD3 Asymmetric diffuser ¹

¹ Available up to 1200 lm/ft.

L. UPLIGHT BLACKOUT PLATE

UB00 Not required **UB_ _** Blackout plate ¹

¹ Available on a per foot basis. May be required to prevent lighting up duct work in a loft type application.

M. VOLTAGE

V1 120/277V **V2** 240V ¹ **V3** 347V ² **V4** Low Voltage ³

¹ Not available in North America.

² Only available with DA01 dimming.

³ Only available with DA45 dimming.

N. DIMMING

DA01 0-10V Dimming 1.0% **DA02** 0-10V Dimming 0.1% ¹ **DA20** DALI Dimming 0.1% ¹ **DA21** DALI Dimming 1.0% ¹
DA30 DSI/switchDim ² **DA45** PoE ³

¹ Not available with V3.

² Not available in North America.

³ Only available with V4.

O. CEILING TYPE

G1 Grid ceiling ¹ **H1** Hard ceiling ²

The cost for the canopies, power cables, connections mechanisms and endcaps for the fixture has been added to these items.

¹ Combo kit provided includes installation to T-bar and through tile mount.

² Designed for drywall ceilings.

P. SUSPENSION

HLA03 3ft cable suspension **HLA06** 6ft cable suspension **HLA09** 9ft cable suspension

Q. FIXTURE FINISH

FA01 White - Textured **FA02** Black Metallic - Textured **FA20** Silver Metallic - Textured **FA25** Gold Metallic - Textured
FA27 Wood grain - Light Cherry ¹ **FA28** Wood grain - Dark Walnut ¹ **FA44** Midnight Blue Metallic - Textured **FA45** Copper Metallic
FA46 Charcoal Metallic - Textured **FA47** Bronze Metallic - Textured **FA52** Champagne Metallic **FA53** Red Metallic - Textured

¹ Longer than normal lead times may apply, consult factory.

R. CANOPY FINISH

CF01 White **CF02** Black Metallic - Textured **CF20** Silver Metallic - Textured **CF25** Gold Metallic - Textured
CF44 Midnight Blue Metallic - Textured **CF45** Copper Metallic **CF46** Charcoal Metallic - Textured **CF47** Bronze Metallic - Textured
CF52 Champagne Metallic **CF53** Red Metallic - Textured

S. EMERGENCY

E0 Not required **E1** Emergency system - Integral ¹ **E3** Emergency generator circuit ¹

¹ A drawing will be required at time of ordering to determine the required number and location of the emergency sections or generator circuits. Not available in 347V.

T. CIRCUITS

CS1 Single circuit **CS2** Dual circuit ¹

¹ Independent control of uplight for HLNP2P.

U. SENSORS

7 TECHNICAL DATA

LUMINAIRE

One power cord for every 50 linear feet.

Code	HLNL1P	HLNL2P
Light Direction	Direct	Direct/Indirect

8 PERFORMANCE DATA

DIRECT COMFORT (DD4) - WHITE LOUVER

	LUMEN/FT	WATT/FT	LPW
1300	13	106	
1200	11	108	
1000	9	110	
800	7	114	
700	6	115	
600	5	117	
500	4	119	
400	3	121	
300	3	126	
200	2	128	

DIRECT COMFORT (DD4) - BLACK LOUVER

	LUMEN/FT	WATT/FT	LPW
700	13	57	
600	11	58	
500	9	59	
400	7	61	
300	5	63	
200	3	65	

DIRECT COMFORT (DD4) - SATIN CHROME LOUVER

	LUMEN/FT	WATT/FT	LPW
1000	13	84	
800	9	87	
700	9	89	
600	7	90	
500	5	93	
400	4	95	
300	3	95	
200	2	98	

DIRECT COMFORT (DD4) - SATIN GOLD LOUVER

	LUMEN/FT	WATT/FT	LPW
1000	13	82	
800	9	85	
700	9	87	
600	7	88	
500	5	91	
400	4	93	
300	3	93	
200	2	96	

DIRECT COMFORT (DD4) - SATIN CHAMPAIGN LOUVER

	LUMEN/FT	WATT/FT	LPW
1000	13	84	
800	9	87	
700	9	89	
600	7	90	
500	5	93	
400	4	95	
300	3	95	
200	2	98	

INDIRECT BATWING (UD1)


	LUMEN/FT	WATT/FT	LPW
1600	13	133	
1400	10	138	
1200	9	142	
1000	7	245	
800	6	247	
600	4	151	
400	3	154	
200	1	154	

INDIRECT ASYMMETRIC (UD3)

	LUMEN/FT	WATT/FT	LPW
1200	13	97	
1000	10	100	
800	9	102	
600	6	107	
400	4	107	
200	2	109	
		112	


9 TM-30 DATA

CCT 2700K

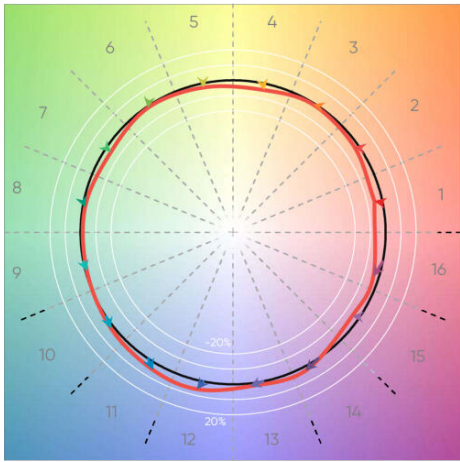


CRI(Ra)	93
CRI(R9)	61
TM30(Rf)	91
TM30(Rg)	98
Duv	-0.0022

CCT 3000K

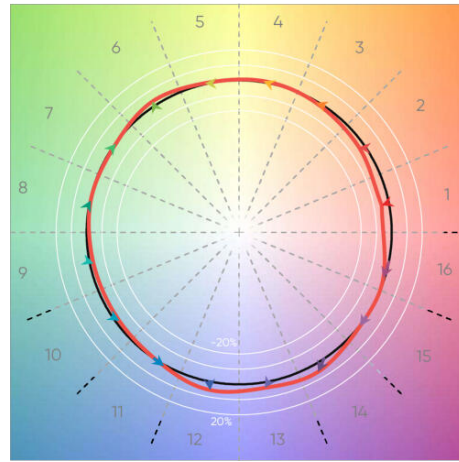


CRI(Ra)	92
CRI(R9)	58
TM30(Rf)	92
TM30(Rg)	100
Duv	-0.0003

CCT 3500K

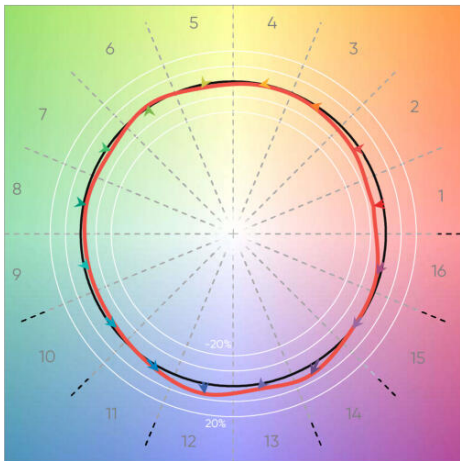






CRI(Ra)	91
CRI(R9)	53
TM30(Rf)	90
TM30(Rg)	99
Duv	-0.0007




CCT 4000K

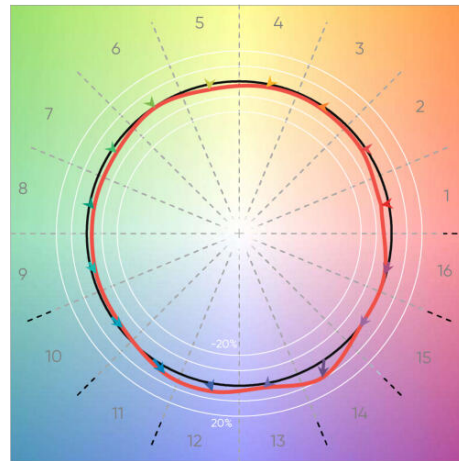

CRI(Ra)	93
CRI(R9)	64
TM30(Rf)	90
TM30(Rg)	98
Duv	0.0000

10 DIMENSIONAL DIAGRAMS

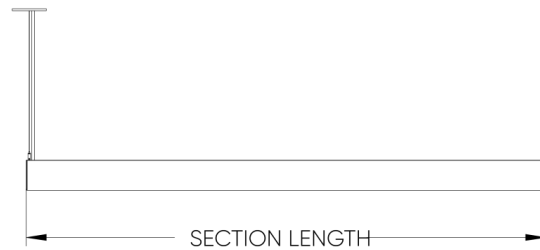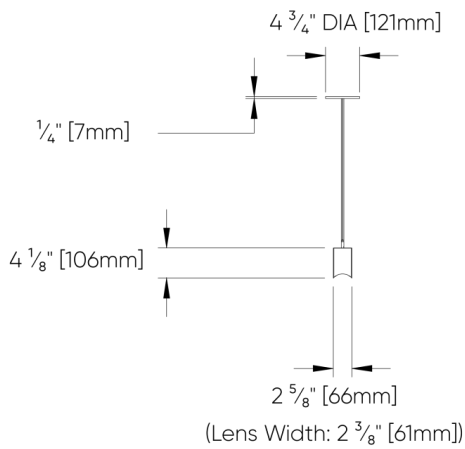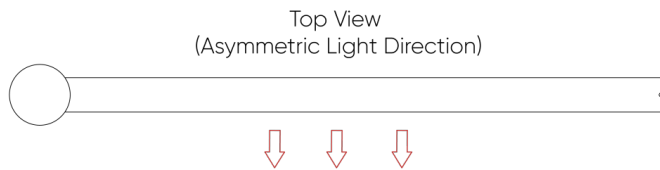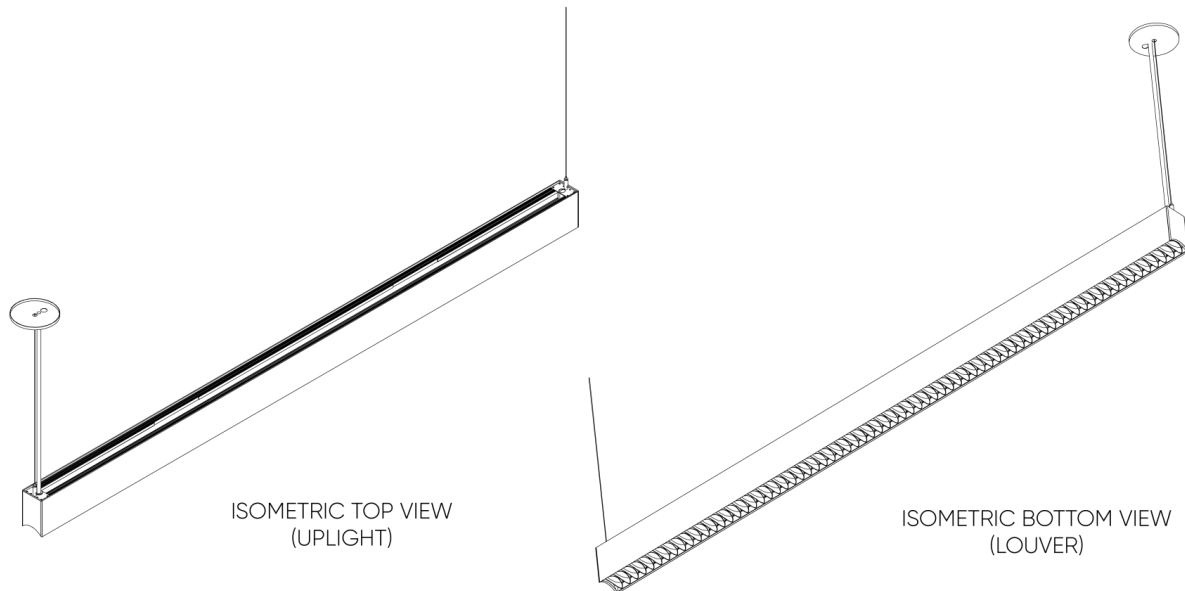

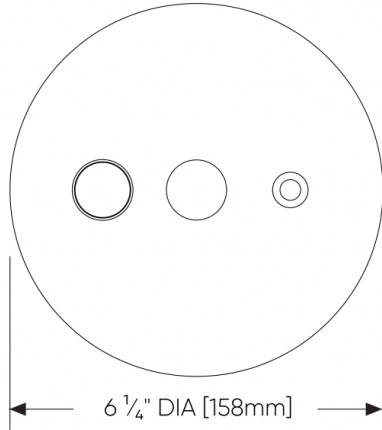

Canopy with Sensor

Standard Canopy