

# REUL™ - MODERN CLASSICS EXTERIOR

Project Name:


Fixture Type:

Fixture Code:

Quantities:



REUL™ - MODERN CLASSICS EXTERIOR

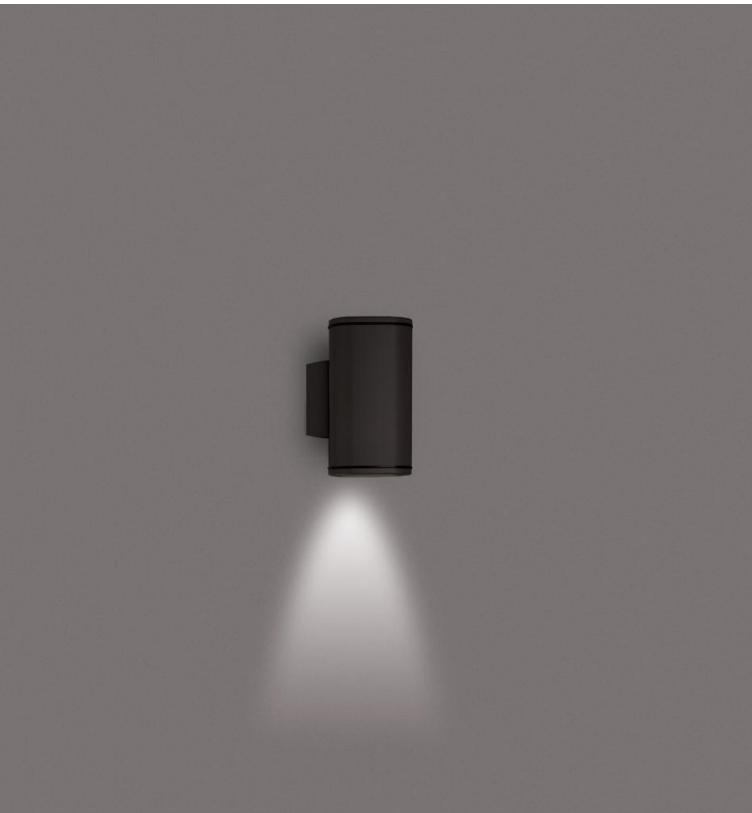

# REUL™ - MODERN CLASSICS EXTERIOR

**REUL** is a facade light designed with a robust triangular aesthetic and engineered with exceptional power in both light output and optical control. 3 beam options are available ranging from 10° to 71°, for either direct or indirect light emission. An internal reflector ensures efficient light distribution allowing Reul to be mounted at higher elevations for wayfinding or to accent facade features.

## GENERAL SPECIFICATION

### Housing

Die-cast and extruded aluminum.

### Lens

Clear glass.

### Reflector

High purity aluminum, semi-specular finish.

### Drivers

HPF electronic drivers, 120/277V.

### Mechanical

Mounts directly over a junction box (by others). Mounting hardware (by others).

### External Screws

Stainless steel.

### Gaskets

One piece silicone.

### Finish

Double powder coated.

### Minimum Starting Temperature

-20°C (-30°C for LEDs).

### Delivered Lumens

Delivered lumens & LPW based on 3000K (min 80 CRI).

## OPTICS & FEATURES



Ext-Wall Downlight    Ext-Wall Up/Down

# REUL™ - MODERN CLASSICS EXTERIOR

## HOW TO ORDER

### A. LUMINAIRE

**232000** 1 x 26W, 10°, 2826 lms

**232011** 1 x 32W, 28°, 3849 lms

**232022** 2 x 26W, 2 x 71°, 3904 lms

**232001** 1 x 26W, 28°, 2678 lms

**232012** 1 x 32W, 71°, --- lms

**232002** 1 x 26W, 71°, 2439 lms

**232020** 2 x 26W, 2 x 10°, 4221 lms

**232010** 1 x 32W, 10°, --- lms

**232021** 2 x 26W, 2 x 28°, --- lms

### B. CCT

**30** 3000K

**40** 4000K

### C. FINISH

**BL** Black Metallic Textured

**AG** Anthracite Gray

**GR** Light Gray

### D. OPTIONS

**DB** Dimming 0-10V, 10%<sup>1</sup>


<sup>1</sup> Dimming is equal to or less than 10%.

## TECHNICAL DATA

### LUMINAIRE

<b>Code</b>	<b>232000</b>	<b>232001</b>	<b>232002</b>	<b>232010</b>	<b>232011</b>	<b>232012</b>
<b>Power (LED)</b>	1 x 26W	1 x 26W	1 x 26W	1 x 32W	1 x 32W	1 x 32W
<b>Beam</b>	10°	28°	71°	10°	28°	71°
<b>Delivered lms</b>	2826	2678	2439	---	3849	---
<b>LPW</b>	109	103	94	---	120	---
<b>Length (A)</b>	15.7"	15.7"	15.7"	15.7"	15.7"	15.7"
<b>Code</b>	<b>232020</b>	<b>232021</b>	<b>232022</b>			
<b>Power (LED)</b>	2 x 26W	2 x 26W	2 x 26W			
<b>Beam</b>	2 x 10°	2 x 28°	2 x 71°			
<b>Delivered lms</b>	4221	---	3904			
<b>LPW</b>	81	---	75			
<b>Length (A)</b>	23.2"	23.2"	23.2"			

### FINISH



Black Metallic Textured



Anthracite Gray



Light Gray

# REUL™ - MODERN CLASSICS EXTERIOR

## APPROVALS



# REUL™ - MODERN CLASSICS EXTERIOR

## DIMENSIONAL DIAGRAMS

